


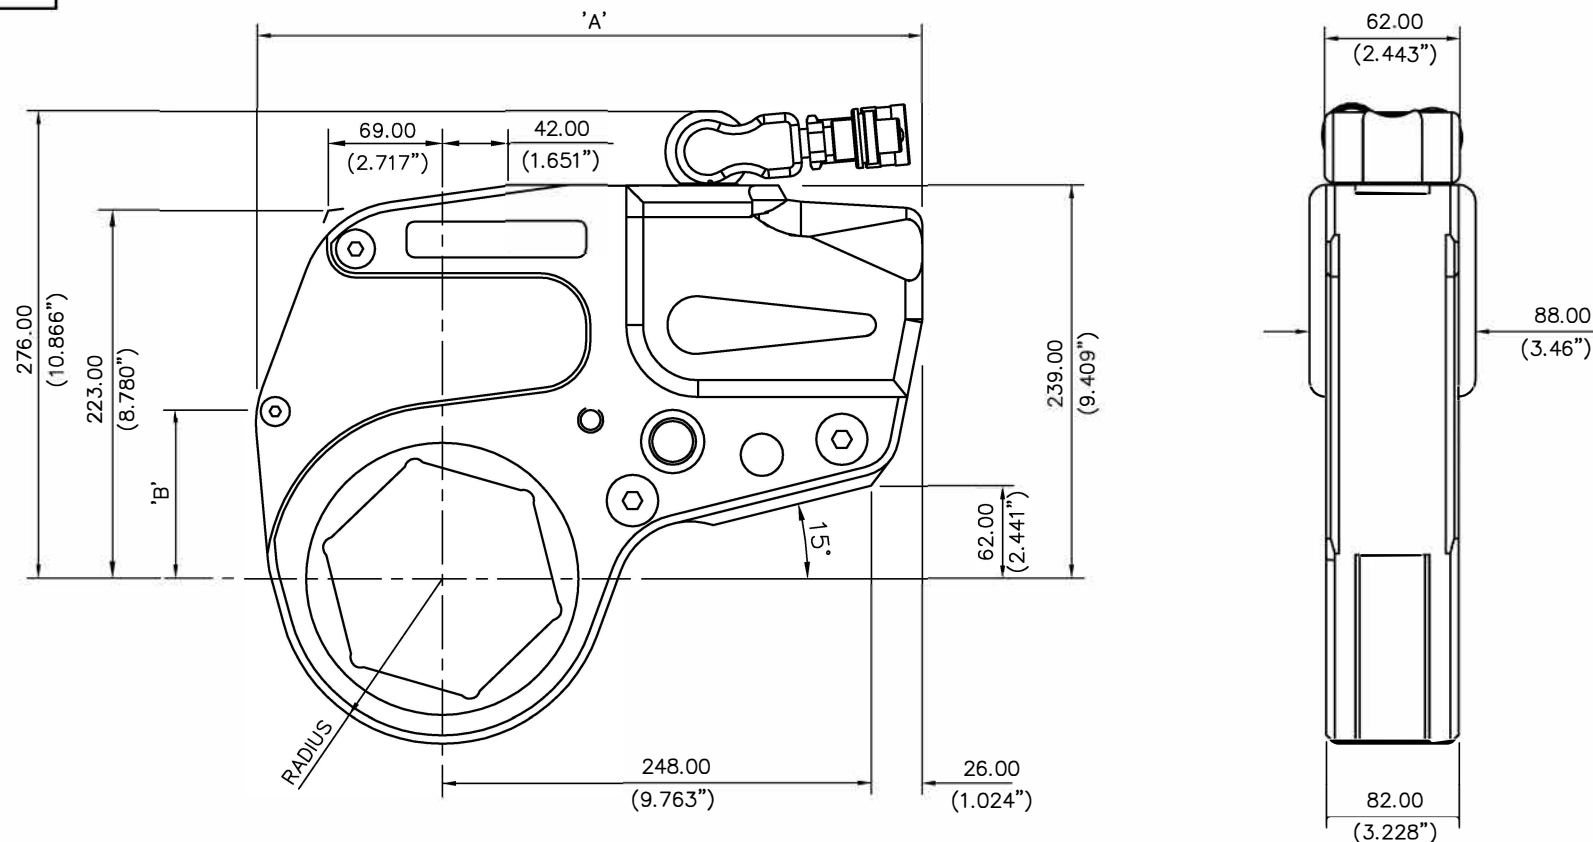

LINK PART NO	LINK A/F	'A'	'B'	RADIUS
TWL30-080LR	80 (3-1/8")	388.0 (15.472")	104.0 (4.094")	77.00 (3.031")
TWL30-085LR	85 (3-3/8")	388.0 (15.472")	104.0 (4.094")	77.00 (3.031")
TWL30-090LR	90 (3-1/2")	388.0 (15.472")	104.0 (4.094")	77.00 (3.031")
TWL30-095LR	95 (3-3/4")	388.0 (15.472")	104.0 (4.094")	83.00 (3.268")
TWL30-100LR	100 (3-7/8")	388.0 (15.472")	104.0 (4.094")	83.00 (3.268")
TWL30-105LR	105	388.0 (15.472")	104.0 (4.094")	89.00 (3.504")
TWL30-425LR	4-1/4"	388.0 (15.472")	104.0 (4.094")	89.00 (3.504")
TWL30-110LR	110	388.0 (15.472")	104.0 (4.094")	89.00 (3.504")
TWL30-115LR	115	388.0 (15.472")	104.0 (4.094")	92.00 (3.622")
TWL30-463LR	4-5/8"	388.0 (15.472")	104.0 (4.094")	92.00 (3.622")
TWL30-120LR	120	388.0 (15.472")	109.0 (4.291")	99.00 (3.898")
TWL30-500LR	5"	388.0 (15.472")	109.0 (4.291")	99.00 (3.898")

LINK PART NO	LINK A/F	'A'	'B'	RADIUS
TWL30-130LR	130 (5-1/8")	388.0 (15.472")	104.0 (4.094")	101.0 (3.972")
TWL30-135LR	135 (5-3/8")	388.0 (15.472")	104.0 (4.094")	101.0 (3.972")
TWL30-145LR	145 (5-3/4")	388.0 (15.472")	104.0 (4.094")	106.0 (4.172")
TWL30-150LR	150 (5-7/8")	388.0 (15.472")	104.0 (4.094")	112.0 (4.411")
TWL30-155LR	155 (6-1/8")	388.0 (15.472")	104.0 (4.094")	112.0 (4.411")

© SPX Bolting Systems

The information on this sheet is on licence to SPX Bolting Systems. It is confidential and must only be used for the purpose for which it is supplied. It must not be copied or communicated to any third party without permission in writing from SPX Bolting Systems.

General Tol. ±0.25 USO	Quantity —	Material —	Heat Treatment	Finish Processes —	
Surface Finish 3.2 µm USO					
Geometric Tol.	Drawn by	Checked by	File Name	Date 2023/11/03	Scale NTS
⊙ 0.10	SPX				
// 0.20					
⊕ 0.25					
			Title TWLC30-LR ASSEMBLY DIMENSIONS		
			Drawing Number TWLC30GA0022		Edition 1
			Sheet 1/1		

Rev	Revision Description	Date	Signature	Checked
1				